




WIRED

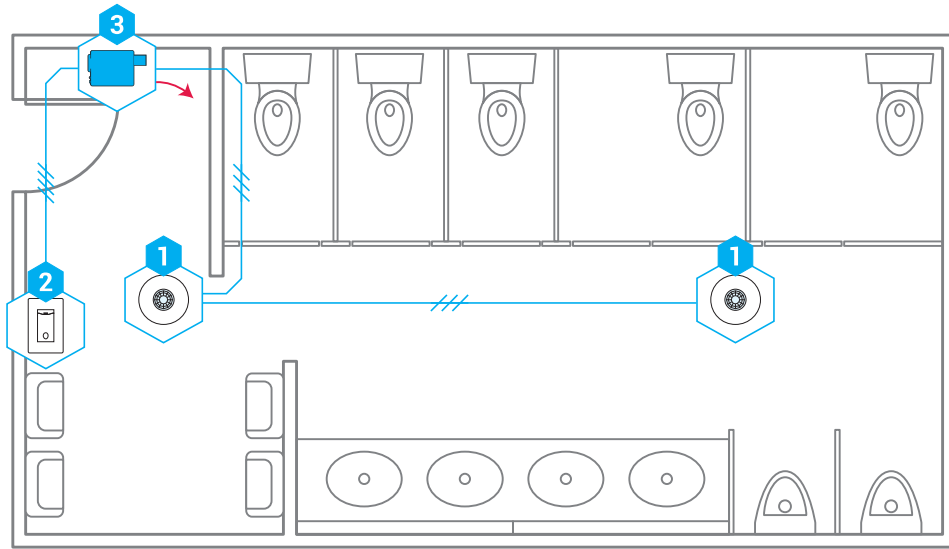

KEY

- TO LINE VOLTAGE CONNECTIONS
- LOW VOLTAGE WIRING (18 AWG)

BILL OF MATERIAL

DIAGRAM #	QTY	MODEL #	DESCRIPTION
	2	SWX-222-1	Dual Technology (PIR/Acoustic) Occupancy Sensor, Large Motion, Ceiling Mount 360°
	1	SWX-801-xx	On/Off Wall Switch - Low Voltage, <xx = color>
	1	SWX-900-AX	Power Pack Controller w/ Auxiliary Switch Input, 120/277 VAC

SEQUENCE OF OPERATION

1. Lighting switched on automatically to full bright.
2. On/off manual control of lighting.
3. Lighting turns off automatically after occupants leave the space.

ADDITIONAL DESIGN CONSIDERATIONS

SUPPORTED CODE REQUIREMENTS

Occupancy Sensor Control
C405.2.1 & C405.2.1.1(1)

Manual Control - Switch
C405.2.2.3

Auto On to Full Allowed
C405.2.1.1.(2)